



MGH Hardened Steel



Parts included: Hardened tip without screw

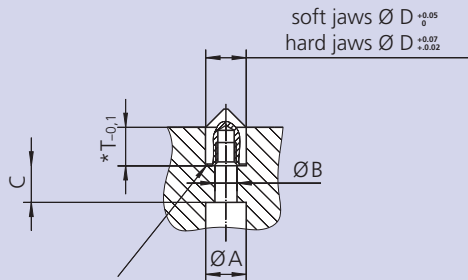




*equal per seth within 0.1 mm

Clamping tips for jaws




- For external and internal gripping
- Increasing gripping allows for heavier cuts
- Rear mounting of bolts
- Point seat can easily be machined: drilling only

Type	MGH 6	MGH 8	MGH 10	MGH 12
Id. No.	081851	087805	081852	081853
D	6	8	10	12
L	10	12	14	16
G	M3	M4	M5	M6
A	6	8	10	11
B	3.4	4.5	5.5	6.6
C	9	9	9	11
T	7.5	8.5	9.5	10.5
R	0.3	0.5	0.5	0.5
Torx Screw ISO 4762	M3 x 14	M4 x 14	M5 x 14	M6 x 16

HDS-R



HDS-Q



Grippers for jaws, fixtures

- For o.d. gripping
- Increase of the transmittable torque on raw or machined work pieces
- Rear mounting threads or side gages for locking
- The pocket can easily be machined

Type	Id. No.	D	H	G	max. load force F ¹⁾ (daN)	rec. mounting	
						bore-Ø + 0.05	bore depth
HDS-R 10	081846	10	10	M5	800	10	9.0
HDS-R 11	081847	12.7	9.5	M5	1100	12.7	8.5
HDS-R 12	081848	12.7	12.7	M6	1100	12.7	11.5
HDS-R 13	081849	15.8	9.5	M6	2000	15.8	8.5
HDS-R 14	081850	19	9.5	M6	3000	19	8.5
HDS-Q 15	033058	12.7	9.5	M6	2000	–	–